

Pop

HOME AND BATHROOM FURNISHING CONFIGURATION
AVAILABLE FROM JUNE 2019

New!



Low thermal inertia



Low water content



Versatility



Easy to stock and install



Working pressure



TOWEL RACK KIT AVAILABLE AS
OPTIONAL ACCESSORY



STANDARD SUPPLY


Model 500 blocks of 5, 6, 8, 10, 12, 14, 16, 18, 20 and 22 sections

Towel rack

Easy to install in the preferred position; the position may be changed afterwards.

All models **Pop** are guaranteed **10 years** from installation date on manufacturing faults, provided that the installation has been performed in compliance with the current norms and respecting the instructions relating to the installation, the correct use and the correct maintenance as illustrated on this catalogue.

Model	Heat output				
	$\Delta T\ 30$	$\Delta T\ 40$	$\Delta T\ 50$	$\Delta T\ 60$	$\Delta T\ 70$
	W/sect.	W/sect.	W/sect.	W/sect.	W/sect.
500/50	23,8	33,9	44,6	55,9	67,6

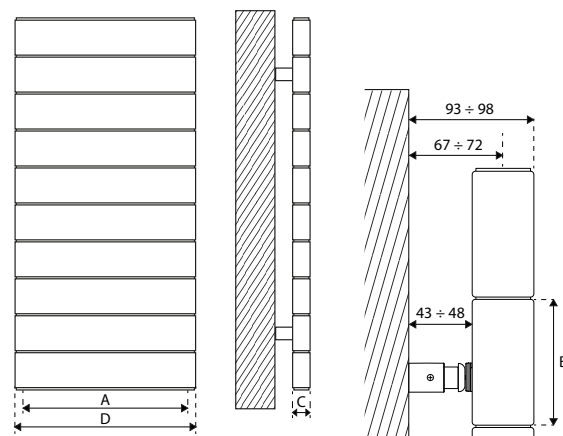



Model	Code	Depth	Height element	Centre distance	Length	Connection diameters	Water capacity	Exponent	Coefficient
		(C) mm	(B) mm	(A) mm	(D) mm	inches	litres/sect.	n	Km
500/50	V331034	50	80	500	553	G1	0,35	1,2332	0,3586

Maximum working pressure: 1600 kpa (16 bar)

Characteristic equation of the model $\Phi = Km \Delta T^n$

The thermal efficiency values shown comply with the European Standard EN 442-1:2014 and are certified by the MRT Lab of the Milan Polytechnic, notified body N°1695.

Item		Description	Code
	-	Mounting kit - Home and bathroom furnishing configuration	550143
	-	Towel rack kit	550145
	A 80	The radiator fixing kit includes: 2 Rh G 1/2" adapters; 2 Lh G 1/2" adapters, galvanized and painted; 4 sealing gaskets; 1 G 1/2" manual bleed valve with seal; 1 G 1/2" blind plug with seal	550103

